

MG Series

ADD PRODUCTS

LOAD MACHINE  
CLOSE DOOR  
SELECT CYCLE

Display shows

Cycle progress

**HOT**  
White cotton

**COOL**  
Normal

**WARM**  
Color-fast  
Perm press

**COLD**  
Delicate

1 2  
3 4

INSERT  
COIN(S)  
/TOKEN(S)  
/CARD

STOP

WASH RINSE SPIN

END OF CYCLE  
DOOR IS READY TO OPEN

25 €

**GIRBAU**

www.girbau.com

**GIRBAU**

LAUNDRY EQUIPMENT

**GROUP**

MG Series

COIN-OP  
WASHER EXTRACTORS

Simple yet highly efficient

MG-613COIN  
MG-617COIN  
MG-623COIN



THE PERFECT COMBINATION OF SIMPLICITY AND HIGH EFFICIENCY

# MG Series COIN-OP

NOISE AND VIBRATION-FREE HIGH SPEED HARD-MOUNT WASHING MACHINES.

Girbau Series 6 MG hard-mount washing machines achieve spin speeds of 750 rpm (200-205 G factor). Their highly effective extract reduces energy consumption in drying compared with traditional hard-mount machines.

## MORE EFFICIENT, MORE FEATURES



With the aim of becoming your partner in achieving a high quality and cost-effective laundry, Girbau presents the 200G Series 6 MG machines; the result of 50 years' experience in laundering.

The user-friendly COIN control system



A series of holes in the drum blades allow the small quantity of existing water to re-circulate correctly in the form of a cascade, thereby increasing the washing action while reducing the rinsing time and the levels and consumption of water.



The machines are fitted with a hot and cold water mixer that enables a highly precise bath temperature and levels to be achieved, thus saving water and energy while reducing processing times.




Controlling the mechanical action of the drum and adjusting the parameters to achieve a greater security in the machine helps to improve the treatment of the linen.

## WHY 200 G?

Example: Cotton

From 10 to 25% difference in final residual humidity, depending on the type of linen.

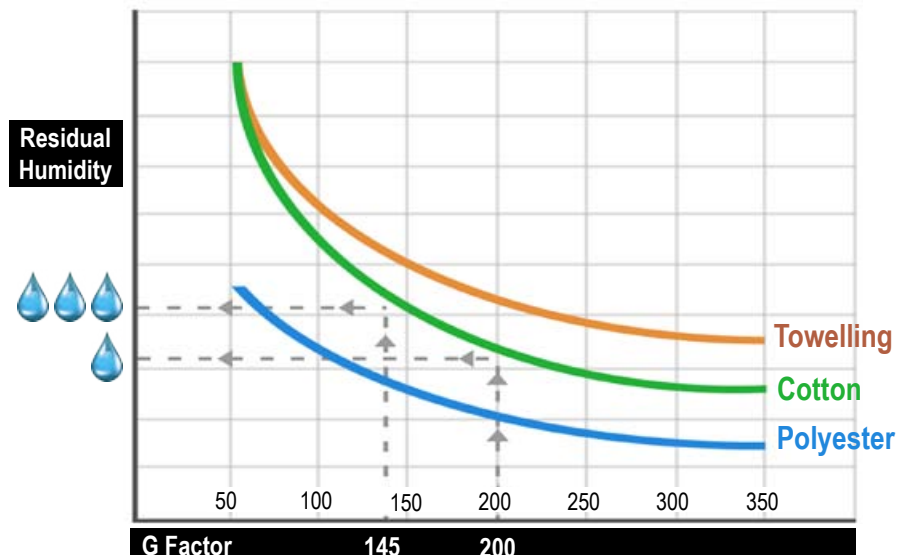


## STURDY AND ERGONOMIC DESIGN

6 Series washer extractors are made to last. All the metal parts that come into direct contact with the linen are manufactured in AISI-304 L stainless steel.

The drum support and bearing box have been made larger and the sealing system is guaranteed.

The large door makes it easy to load and unload the machine.

A carefully designed opening system, with no handle to turn, means that the door can be opened with the minimum of effort.

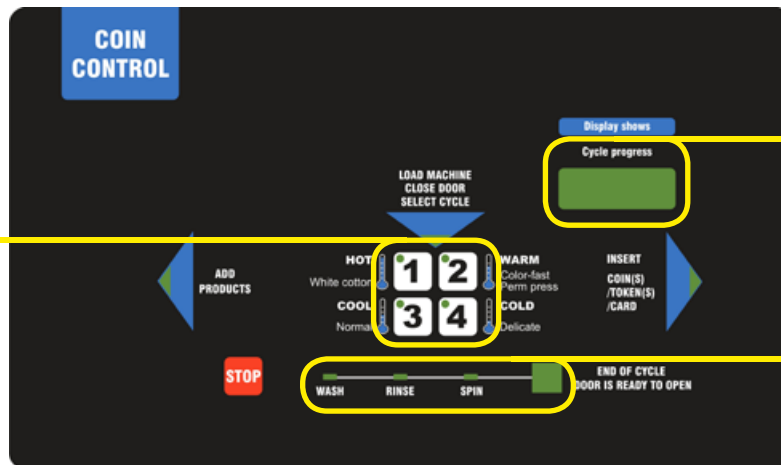

Program selectors with LED indicators

Information on cost and program time. Option of an internal clock for programming different prices for different time slots.

Wash process phase indicator.

## 4 WASH PROGRAMS




**HOT**  
White cotton

**HOT**  
Super wash at 60°C for very soiled white or color linen.



**WARM**  
Color-fast  
Perm press

**WARM**  
Warm wash at 50°C for soiled white or color-fast linen.

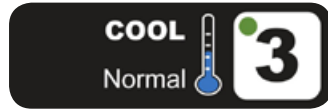

**COOL**  
Normal

**COOL**  
Cool wash at 30°C, programmed for synthetic/mixed linen.



**COLD**  
Delicate

**COLD**  
Gentle wash at 20°C for delicate items.



## REAR CONNECTION FOR EXTERNAL DOSING

Direct external input at the rear for connection to the automatic dosing system.

## PAYMENT SYSTEM POSSIBILITIES



**VENDING**  
By means of a central payment system.



**COIN BOX**  
■ Simple  
■ Double  
■ Electronic



**PUSH-BUTTON**  
Start button






## MG SERIES WASHER EXTRACTORS

MODEL		MG-613 PRO	MG-617 PRO	MG-623 PRO
Capacity	kg 1/10 (lbs)	13 (29)	17 (36,5)	23 (50)
	kg 1/9 (lbs)	14 (31)	19 (42)	25 (55)
Drum Ø	mm (in.)	620 (24,4)	620 (24,4)	700 (27,6)
Drum depth	mm (in.)	416 (16,4)	549 (21,6)	586 (23,1)
Drum volume	dm <sup>3</sup> (cu.ft)	126 (4,44)	166 (6)	226 (8)
Net weight	kg (lbs)	264 (582)	282 (622)	364 (802)
Crated weight	kg (lbs)	289 (637)	310 (683)	394 (869)
Height <b>H</b>	mm (in.)	1.325 (52,2)	1.325 (52,2)	1.404 (55,3)
Width <b>L</b>	mm (in.)	750 (29,5)	750 (29,5)	868 (34,2)
Depth <b>P</b>	mm (in.)	883 (34,8)	1.016 (40)	1.098 (43,2)
Ø Door opening	mm (in.)	327 (13)	327 (13)	426 (17)
Floor to door <b>h</b>	mm (in.)	500 (20)	500 (20)	500 (20)
Washing speed	r.p.m.	47	47	44
Distribution speed	r.p.m.	100	100	100
Spin speed	r.p.m.	760	760	715
G-Force		200	200	200
Max. motor power	kW	0,47	0,6	0,85
Electric heating <b>E</b>	kW	1Ph: 6 or 8 3Ph: 9 or 12	1Ph: 6 or 10 3Ph: 9 or 15	3Ph: 12 or 19,5
Voltage	H,V	200-240V 1Ph 50/60Hz	200-240V 1Ph 50/60Hz	200-240V 1Ph 50/60Hz
	E	200-240V 1 or 3Ph 50/60Hz 380-415V 3Ph 50/60Hz	200-240V 1 or 3Ph 50/60Hz 380-415V 3Ph 50/60Hz	380-415V 3Ph 50/60Hz
Shipping dimensions <b>LxPxH</b>	mm (in.)	777x945x1.494 (30,6x37,2x59)	777x1.078x1.494 (30,6x42,4x59)	897x1.153x1.565 (35,3x45,4x61,6)

**H,V** : Hot water, Steam heating

GIRBAU S.A. reserves the right to change design and/or specifications without notice.

**E** : Electric heating

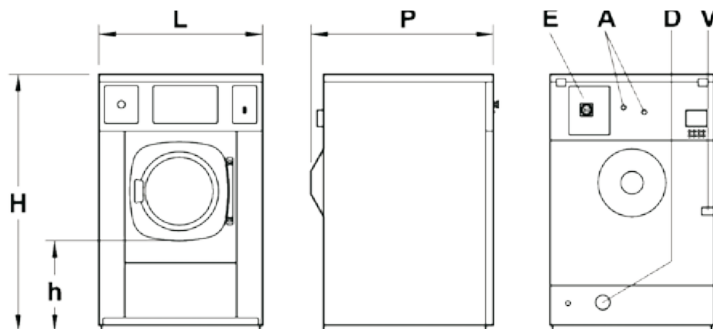

### HEADQUARTERS

GIRBAU, S.A. Ctra de Manlleu, km. 1 - 08500 Vic (Barcelona) Spain - [www.girbau.com](http://www.girbau.com)  
tel. (+34) 93 886 2219 - Fax (+34) 93 886 0785 - [sales@girbau.es](mailto:sales@girbau.es)

### BRANCHES

Argentina - Buenos Aires - Tel. +54-1 149017600 - [girbauargentina@girbau.com.ar](mailto:girbauargentina@girbau.com.ar)  
Brazil - Sao Paulo - Tel. +55 11-29820446 - [girbaudobrasil@girbau.com.br](mailto:girbaudobrasil@girbau.com.br)  
China - Shenzhen - Tel. +86-755-8211 1330 - [info@girbau.com.cn](mailto:info@girbau.com.cn)  
Cuba - La Habana - Tel. (+53-7) 8662071 al 73 - [girbau@girbau.co.cu](mailto:girbau@girbau.co.cu)  
Dominican Rep. - Punta Cana - Tel. +1 809-959-0615 - [info@girbau.do](mailto:info@girbau.do)  
France - Roissy (Paris) - Tel. +33 1-49388585 - [info@girbau.fr](mailto:info@girbau.fr)  
Germany - Hannover - Tel. +49-5119357570 - [girbau@girbau.de](mailto:girbau@girbau.de)  
Italy - Venezia - Tel. +39 335 7294655 - [info@girbau.com](mailto:info@girbau.com)  
U.A.E. - Dubai - Tel. +971 4-8839951 - [sales@girbau.ae](mailto:sales@girbau.ae)  
U.K. - Hitchin - Tel. +44(0)-1462 427780 - [info@girbau.co.uk](mailto:info@girbau.co.uk)  
U.S.A. - Oshkosh, Wi - Tel. +1(920) 2318222 - [info@continentalgirbau.com](mailto:info@continentalgirbau.com)